

How to Order Hydraulic Hose and Fittings

To make ordering Parker products easier, we have outlined the nomenclature for hose and fittings on this page. For information on ordering hose assemblies, see Section A.

How to Select Hose

Example: 451TC-8

451TC-8 - Hose type

451TC-8 - Indicates the special feature of the hose
(in this case, 'Tough Cover')

451TC-8 - Hose inside diameter dash size (in this case, 8/16" or 1/2")



How to Select Parkrimp Hose Fittings

Example: 1JC43-12-8C

1JC43-12-8C - Fitting (1 = Crimp, 2 = Field Attachable, 3 = Push-Lok, Blank = Nipple with clamp or shell)

1JC43-12-8C - End connection (In this case, a female Seal-Lok – swivel – straight)

1JC43-12-8C - Fitting series

1JC43-12-8C - Size of fitting end connection (In this case, 12/16" or 3/4")

1JC43-12-8C - Hose size (In this case, 8/16" or 1/2")

1JC43-12-8C - Fitting material:

No Suffix = Steel

B = Brass

C = 316 Stainless Steel

BA = Brass Nipple with Steel Nut and Socket

BS = Brass Nipple with Brass Nut and Socket

SM = Metric Hex



How to Select Two-Piece Field Attachable Fittings

When selecting a two-piece field attachable fitting, the fitting part number (found in Section B of this catalog) needs to be broken down into two distinct numbers for the nipple and the socket.

Example: 20120-16-16B

Socket Part Number

Example: 20020-16B

20020-16B - Fitting (1 = Crimp, 2 = Field Attachable, 3 = Push-Lok, Blank = Nipple with clamp or shell)

20020-16B - End connection ("00" represents that it is a socket)

20020-16B - Fitting series

20020-16B - Hose size (In this case, 16/16" or 1")

20020-16B - Fitting material:

No Suffix = Steel


B = Brass

C = 316 Stainless Steel

BA = Brass Nipple with Steel Nut and Socket

BS = Brass Nipple with Brass Nut and Socket

SM = Metric Hex

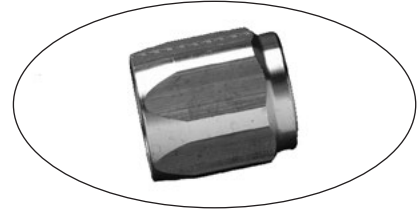

Nipple Part Number

Example: 0120-16-16B

0120-16-16B - Fitting (1 = Crimp, 2 = Field Attachable, 3 = Push-Lok, Blank = Nipple with clamp or shell)

0120-16-16B - End connection (In this case, a male NPTF Pipe – rigid – straight)

0120-16-16B - Fitting series

0120-16-16B - Size of fitting end connection (In this case, 16/16" or 1")

0120-16-16B - Hose size (In this case, 16/16" or 1")

0120-16-16B - Fitting material:

No Suffix = Steel

B = Brass

C = 316 Stainless Steel

BA = Brass Nipple with Steel Nut and Socket


BS = Brass Nipple with Brass Nut and Socket

SM = Metric Hex



Dimensions and pressures are for reference only and are subject to change.

How to Order Crimped Hose Assemblies

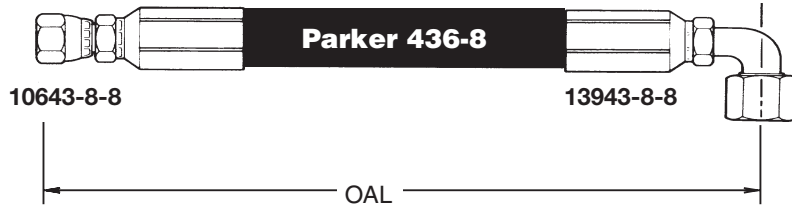

Prefix	Hose Type	Fitting End Configuration		Fitting End Connection Size		Hose Size	Fitting Material	Overall Length (OAL)	Displacement Angle	Hose Assembly Guard
		1st	2nd	1st	2nd					
F	436	06	39	08	08	08		-24		


Prefix	
Symbol	Description
F	Parkrimp Crimp Fittings (i.e. 43 Series)
P	Parkrimp Crimp Fittings (i.e. 26 Series)
Y	Permanent Crimp Fittings (i.e. HY Series)
K	Permanent Crimp Fittings (i.e. 81 Series)

Fitting Material	
Symbol	Description
	No Suffix = Steel
B	Brass
C	316 Stainless Steel
BA	Brass nipple with steel nut and socket
BS	Brass nipple with brass nut and socket

Hose Type	
Symbol	Description
436	SAE 100R16 Hose

Overall Length (OAL)	
Symbol	Description
24	Expressed in inches (610 mm)
OAL of a hose assembly is measured from the end of the straight fitting or centerline of the fitting seat. OAL of the Seal-Lok® hose assembly is measured to the sealing surface of the straight fittings or to the centerline of the elbow fittings.	

1st Fitting End Configuration	
Symbol	Description
06	Female JIC 37° Swivel Straight
Note: See page 14 for a complete list of fitting configurations.	

Displacement Angle	
Symbol	Description
270	Specified only if two (2) elbow fittings are used. Starting with either end as the far end, measure angle clockwise to describe the displacement angle of the near end.
	

2nd Fitting End Configuration	
Symbol	Description
39	Female JIC 37° Swivel 90° Elbow - Short Drop
Note: See page 14 for a complete list of fitting configurations.	

1st Fitting End Connection Size	
Symbol	Description
08	1/2" Female JIC (3/4x16 thread)

Hose Assembly Guards	
Symbol	Description
SG	Spring Guard
AG	Armor Guard
HG	Polyguard
PG	Parkoil
FS	Fire Sleeve
AS	Partek Sleeving
PS	Partek Sleeving
Note: When spelling out an assembly part number list entire sleeving part number	


2nd Fitting End Connection Size	
Symbol	Description
08	1/2" Female JIC (3/4x16 thread)

Hose Size	
Symbol	Description
08	1/2" Hose ID

Dimensions and pressures are for reference only and are subject to change.



How to Order Field Attachable Hose Assemblies

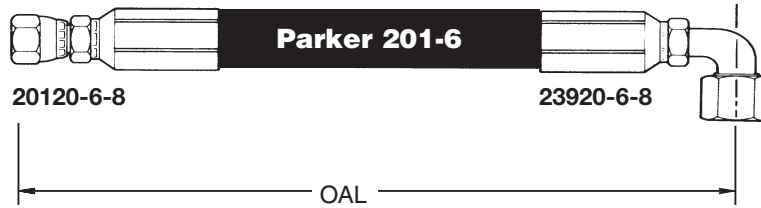

Prefix	Hose Type	Fitting End Configuration		Fitting End Connection Size		Hose Size	Fitting Material	Overall Length (OAL)	Displacement Angle	Hose Assembly Guard
		1st	2nd	1st	2nd					
R	201	01	06	06	06	08		-24		


Prefix	
Symbol	Description
R	Field Attachable (i.e. 20 Series)
M	Mandrel (i.e. 23 Series)
B	Clamp (i.e. 88HC-H and 88DB on 88 Series)
C	Worm Gear Clamp (i.e. 88H Series on 88 Series)

Fitting Material	
Symbol	Description
No Suffix	= Steel
B	Brass
C	316 Stainless Steel
BA	Brass nipple with steel nut and socket
BS	Brass nipple with brass nut and socket

Hose Type	
Symbol	Description
201	SAE 100R5

Overall Length (OAL)	
Symbol	Description
24	Expressed in inches (610 mm)
OAL of a hose assembly is measured from the end of the straight fitting or centerline of the fitting seat. OAL of the Seal-Lok® hose assembly is measured to the sealing surface of the straight fittings or to the centerline of the elbow fittings.	

1st Fitting End Configuration	
Symbol	Description
01	Male NPTF Straight
Note: See page 14 for a complete list of fitting configurations.	

Displacement Angle	
Symbol	Description
270	Specified only if two (2) elbow fittings are used. Starting with either end as the far end, measure angle clockwise to describe the displacement angle of the near end.
	

2nd Fitting End Configuration	
Symbol	Description
06	JIC 37° Flare Straight
Note: See page 14 for a complete list of fitting configurations.	

1st Fitting End Connection Size	
Symbol	Description
06	3/8" Pipe Thread

Hose Assembly Guards	
Symbol	Description
SG	Spring Guard
AG	Armor Guard
HG	Polyguard
PG	Parkoil
FS	Fire Sleeve
AS	Partek Sleaving
PS	Partek Sleaving
Note: When spelling out an assembly part number list entire sleaving part number	

2nd Fitting End Connection Size	
Symbol	Description
06	3/8" JIC (9/16x18 thread)

Hose Size	
Symbol	Description
08	13/32" Hose ID

Dimensions and pressures are for reference only and are subject to change.

How to Select Hose



How To Select A Hose (STAMPED)

Size	The appropriate inside and outside diameters and length of the hose should be determined
Temperature	The maximum temperature of the material being conveyed
Application	External conditions including abrasion, climate, heat, flexing, crushing, kinking, and degrees of bending
Media	The composition of the substance being conveyed and chemical compatibility with the hose inner core and, if applicable, the outer jacket
Pressure	The maximum pressure of the system, including pressure spikes
Ends	The appropriate end connection and attachment method for the application
Delivery	Testing, quality, packaging, and delivery requirements

Dimensions and pressures are for reference only and are subject to change.

How to Order Thermoplastic Hose Assemblies



Prefix	Hose Type	Fitting End Configuration		Fitting End Connection Size		Hose End Dash Size	Fitting Material	Overall Length (OAL)	Displacement Angle
		1st	2nd	1st	2nd				
F	540N	06	-39	12	12	12		-52	

Prefix	
Symbol	Description
F	Parkrimp (i.e. 55 series)
A	Factory Crimp (i.e. 54 series)
R	Field Attachable (i.e. 51 series)

Hose Type			
D6/D6R	590	53DM	1035A
H6	593	540N	1035HT
R6	510A	540P	83FR
HFS	510C	55LT	B9
HFS2	518C	56DH	5CNG
M8	515H	575X	HLB
HTB	520N	580N	MSH
HJK	528N	H580N	PTH
560	526BA	588N	SLH
563	527BA		

1st and 2nd Fitting End Configuration	
Symbol	Description
01	Male Pipe Thread (with hex) - NPTF
02	Female Pipe Thread - NPT
03	Male SAE (JIC) 37° Flare
05	Male Straight Thread w/ O-Ring
06	Female SAE (JIC) 37° Swivel
07	Female Pipe Swivel
13	Male Pipe Swivel - NPTF
37	Female SAE (JIC) 37° Swivel - 45° Elbow
39	Female SAE (JIC) 37° Swivel - 90° Elbow
41	Female SAE (JIC) 37° Swivel - 90° Long Elbow
JC	Female Seal-Lok™ (ORFS) Swivel Short
FU	Female JIC/BSP 30° Flare Swivel
MU	Metric Female JIC/BSP 30° Flare Swivel
J0	Male Seal-Lok™ (ORFS) Rigid Straight w/O-Ring
GU	Female JIC/BSP Parallel Pipe Swive (60° Cone)
JS	Female Seal-Lok™ (ORFS) Swivel
J7	Female Seal-Lok™ (ORFS) Swivel - 45° Elbow
J9	Female Seal-Lok™ (ORFS) Swivel - 90° Elbow
TU	Universal Tube Stub
AL	A-LOK® Compression

Note: See page 14 for a complete list of fitting configurations.

1st Fitting End Connection Size					
Symbol	Description				
-2	1	1/8	-6	1	3/8
-3	1	3/16	-8	1	1/2
-4	1	1/4	-10	1	5/8
-5	1	5/16	-12	1	3/4


2nd Fitting End Connection Size					
Symbol	Description				
-2	2	1/8	-6	2	3/8
-3	2	3/16	-8	2	1/2
-4	2	1/4	-10	2	5/8
-5	2	5/16	-12	2	3/4

Hose Size					
Symbol	Description				
-2	=	1/8	-6	=	3/8
-3	=	3/16	-8	=	1/2
-4	=	1/4	-10	=	5/8
-5	=	5/16	-12	=	3/4

Fitting Material	
Symbol	Description
No Suffix	Steel
B	Brass
C	Stainless Steel

Overall Length (OAL)	
Symbol	Description
	Expressed in inches
	Note: Face Seal type fittings are measured from sealing face.


Displacement Angle	
Symbol	Description
270	Specified only if two (2) elbow fittings are used to construct hose assembly. Starting with either end as the far end, measure angle clockwise to describe the displacement angle of the near end.




Dimensions and pressures are for reference only and are subject to change.

How to Order Fluoropolymer Hose

Hose Assembly Nomenclature



Prefix	Hose Type	Fitting End Configuration		Fitting End Connection Size		Hose End Dash Size	Fitting Material	Length	Displacement Angle
		1st	2nd	1st	2nd				
P	919	06	39	08	08	08	C	30	N/A
R Field Attachable Fitting P Permanent Crimp 91N & 93N Series F 91 Series Crimp							Blank = Steel C Stainless B Brass	Overall Length always expressed in inches If elbow fittings are used overall length is measured from the centerline of the seat	Specified only if two elbow fittings are used. Starting with either end as the far end, measure the angle clockwise to describe the displacement of the near end. 

This assembly example reflects a 1/2" ID 919 hose with an SAE 1/2" female JIC 37° straight fitting on the first end and an SAE 1/2" 90° female JIC 37° elbow fitting on the other. The fittings are crimped (permanently attached) and stainless steel. The overall length is 30".

The first fitting part number is 10691N-8-8
The second fitting part number is 13991N-8-8

Special Notes

Assemblies are to be measured extreme end to end. Exceptions:

1. Face seal type fittings shall be measured from sealing face.
2. Where elbow fittings are used, measurement shall be to the centerline of the sealing surface of the elbow end.
3. "A-LOK" and "CPI" fittings are measured from the tube stops.

Hose Fittings Nomenclature

Type	End Configuration Code	Series of Fitting	End Size	Hose Size	Material
1	03	91N	8	6	
1 Crimp 2 Field Attachable					Blank = Steel or Brass/ Steel B All Brass C Stainless Steel S All Carbon Steel

This example describes a permanent crimp 1/2" Male SAE JIC 37° hose end with a 3/8" hose end-this commonly referred to as a "jump size". This fitting is constructed from carbon steel since the designated material is blank.

The callout is: **10391N-8-6**

Dimensions and pressures are for reference only and are subject to change.



Standard Fitting Configurations

by Connection and End Code

Type	Description	End Code
Pipe	Male NPTF Pipe - Rigid - Straight	01
	Male NPTF Pipe - Swivel - Straight	13
	Male NPTF Pipe - Swivel - 90° Elbow	1L
	Female NPTF Pipe - Rigid - Straight	02
	Female NPSM Pipe - Swivel - Straight (60° Cone)	07
SAE Straight Thread	Male SAE Straight Thread with O-Ring - Rigid - Straight	05
	Male SAE Straight Thread with O-Ring - Swivel - Straight	0G
	Male SAE Straight Thread with O-Ring - Swivel - 90° Elbow	0L
	Male SAE Straight Thread with O-Ring - Adjustable - 90° Elbow	35
Flare	Male JIC 37° - Rigid - Straight	03
	Male JIC 37° - Bulkhead without Locknut - Straight	LB
	Female JIC 37° - Swivel - Straight	06
	Female JIC 37° - Swivel - 45° Elbow - Short Drop	37
	Female JIC 37° - Swivel - 45° Elbow - Medium Drop	L7
	Female JIC 37° - Swivel - 90° Elbow - Short Drop	39
	Female JIC 37° - Swivel - 90° Elbow - Medium Drop	L9
	Female JIC 37° - Swivel - 90° Elbow - Long Drop	41
	Male SAE 45° - Rigid - Straight	04
	Female SAE 45° - Swivel - Straight	08
	Female SAE 45 / Swivel - 45° Elbow	77
	Female SAE 45 / Swivel - 90° Elbow	79
	Female SAE 45 / Swivel - 90° Elbow - Long Drop	81
	Female JIC 37°/SAE 45° Dual Flare - Swivel - Straight	06
	Inverted Flare	Male Inverted SAE 45° - Swivel - Straight
Male Inverted SAE 45° - Swivel - 45° Elbow		67
Male Inverted SAE 45° - Swivel - 90° Elbow		69
Female Inverted SAE 45° - Rigid - Straight		29
Seal-Lok	Male Seal-Lok - Rigid - Straight (with O-Ring)	J0
	Male Seal-Lok - Bulkhead without Locknut-Straight (with O-Ring)	JB
	Female Seal-Lok - Swivel - Straight - Long	JS
	Female Seal-Lok - Swivel - Straight - Short	JC
	Female Seal-Lok - Swivel - 221/2° Elbow	J6
	Female Seal-Lok - Swivel - 45° Elbow	J7
	Female Seal-Lok - Swivel - 90° Elbow - Short Drop	J9
	Female Seal-Lok - Swivel - 90° Elbow - Medium Drop	J5
	Female Seal-Lok - Swivel - 90° Elbow - Long Drop	J1
JIS	Female Metric Swivel - Straight (30° Flare)	MU
	Female BSP Parallel Pipe - Swivel - Straight (30° Flare)	FU
	Male BSP Taper Pipe - Rigid - Straight (60° Cone)	UT
	Female BSP Parallel Pipe - Swivel - Straight (60° Cone)	GU
	Female BSP Parallel Pipe - Swivel - 45° Elbow (60° Cone)	G1
	Female BSP Parallel Pipe - Swivel - 90° Elbow (60° Cone)	G2


Type	Description	End Code
Metric	Male Metric L - Rigid - Straight (24° Cone)	D0
	Male Standpipe Metric L - Rigid - Straight	1D
	Female Metric L - Swivel - Straight (Ball Nose)	C3
	Female Metric L - Swivel - 45° Elbow (Ball Nose)	C4
	Female Metric L - Swivel - 90° Elbow (Ball Nose)	C5
	Female Metric L - Swivel - Straight (24° Cone with O-Ring)	CA
	Female Metric L - Swivel - 45° Elbow (24° Cone with O-Ring)	CE
	Female Metric L - Swivel - 90° Elbow (24° Cone with O-Ring)	CF
	Male Metric S - Rigid - Straight (24° Cone)	D2
	Male Standpipe Metric S - Rigid - Straight	3D
	Female Metric S - Swivel - Straight (Ball Nose)	C6
	Female Metric S - Swivel - 45° Elbow (Ball Nose)	C7
	Female Metric S - Swivel - 90° Elbow (Ball Nose)	C8
	Female Metric S - Swivel - Straight (24° Cone with O-Ring)	C9
	Female Metric S - Swivel - 45° Elbow (24° Cone with O-Ring)	0C
	Female Metric S - Swivel - 90° Elbow (24° Cone with O-Ring)	1C
	BSP	Male BSP Taper Pipe - Rigid - Straight
Female BSP Parallel Pipe - Swivel - Straight (60° Cone)		92
Male BSP Parallel Pipe - Rigid - Straight (60° Cone)		D9
Female BSP Parallel Pipe - Swivel - 45° Elbow (60° Cone)		B1
Female BSP Parallel Pipe - Swivel - 90° Elbow (60° Cone)		B2
Female BSP Parallel Pipe - Swivel - 90° Elbow Block Type (60° Cone)		B4
Female BSP Parallel Pipe - Swivel - Straight (Flat Seat)		B5
Male BSP Taper Pipe - Rigid - 45° Elbow		BV
Male BSP Taper Pipe - Rigid - 90° Elbow or Side Outlet	BZ	
Fr. Gaz	Male French Gaz Series - Rigid - Straight (24° Cone)	FG
	Female French Gaz Series - Swivel - Straight (Ball Nose)	F4
Specialty	Male Ferulok Flareless-Rigid-Straight (24° Cone with Nut and Ferrule)	11
	Female Ferulok Flareless - Swivel - Straight (24° Cone)	12
	DIN Metric Banjo - Straight	49
	ANSI B16.5 Flange	4K
	Female A-Lok® Compression	AL
	Female Cam & Groove	FC
	Sanitary Flange & Step Downs	FN
	Mini Sanitary Flange	FV
	Bulkhead w/Zerk Port Integrated	GK
	Male I-Line® Sanitary	H1
	Female I-Line® Sanitary	H2
	Male Sanitary Bevel Seat	H4
	Female Sanitary Bevel Seat	H5
	Male Standpipe - Rigid - Straight (Inch Size Tube OD)	34
	Male Standpipe - Rigid - Straight with V-Notch	TW
	Universal Tube Stub	TU
	Male Rapid Assembly, Straight	WU
	Male Rapid Assembly, 45° Elbow	WW
	Male Rapid Assembly, 90° Elbow	WY

How to Order Adapters

Ordering by Tube Fitting Division Part Number

Parker hose adapter part numbers are made up of three basic components:

Base Letters — The base letters indicates the shape of the adapter. Examples of the most popular shapes are shown below.

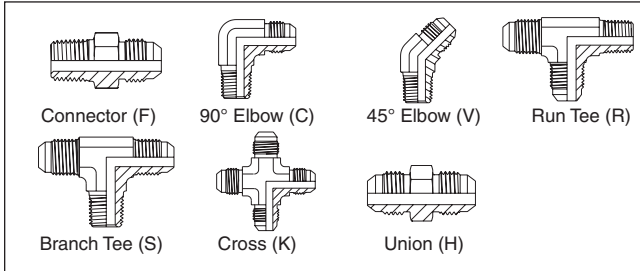

Dash Size — This is one or more numbers preceding the base letters and is used to indicate end sizes in (1/16) of an inch. **Note:** The Tube Fitting Division part numbers for 37° adapters do not reflect the same size sequences used for the Hose nomenclature.

The flared end is referenced first in Tube Fitting nomenclature. The flared end is referenced second in Hose nomenclature.

Example: Tube Fitting Division (TFD) = Hose Division (HPD)
8-FTX-S = 0103-6-8


Material Design — Materials are indicated by a letter suffix added at the end of the part number according to the following code:

Steel (Zinc plated)	S
Brass (37° only)	B
Stainless Steel	SS

Note: Material designations must be made when ordering T.F. parts.

Example:

1. 8-FTX-S — Straight adapter, male SAE (JIC) 37° flare to male pipe (steel)

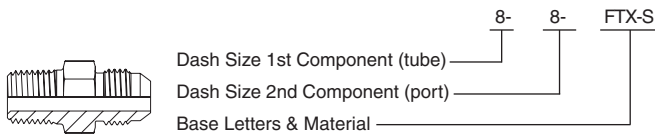

37° Tube Fitting part numbers use only one size or dash number for the following sizes: (2, 3, 4, 5, 6, 8, 10, 14). These sizes are transposed as hose numbers in the chart at right.


When ordering Tube Fitting Division pipe adapters, the size is expressed in complete fractions as 1/4" x 1/8".

The size sequences are the same as the Hose nomenclature but precede the base letters. A single size reference means that all ends are the same size and the fraction will only appear once.

TFD Flare	HPD Pipe Flare	
2	2	-2
3	2	-3
4	2	-4
5	2	-5
6	4	-6
8	6	-8
10	8	-10
14	12	-14

Example:

1/2-MMS-S — Female pipe tee with male pipe branch (steel).

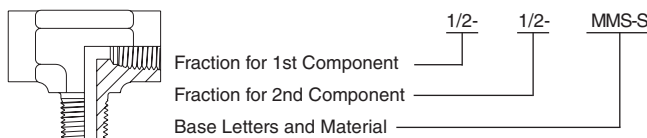

Ordering by Hose Division Part Number

Parker hose adapter part numbers are made up of three basic components:

Base Number — The base number indicates the thread styles and configuration of the adapter by combining the appropriate two digit end configuration numbers. A list of the most popular ends is shown on the following page.


Dash Size — This is one or more numbers following the base number, used to indicate end sizes in sixteenths (1/16) of an inch. The first dash size refers to the first component of the base number and the second dash refers to the second component.

Material Design — Materials are indicated by a letter suffix added at the end of the part number according to the following code:


Steel (Zinc plated)	No suffix
Brass	B
Stainless Steel	C

Examples:

1. 0103-6-8 — Straight adapter, male pipe to male SAE (JIC) 37° flare (steel)

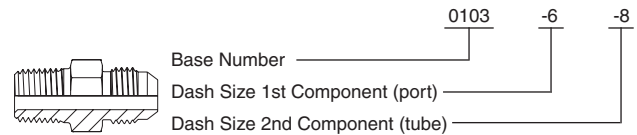

2. 212T-8-8 — Female pipe tee with male pipe branch (steel).

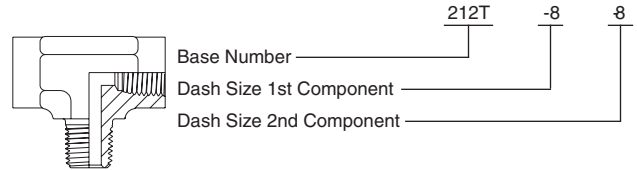

Dimensions and pressures are for reference only and are subject to change.

How to Order Pneumatic Quick Couplings

Checklist for Selecting Quick Couplings

- What are the functional requirements of the coupling?
- What is the maximum working pressure of the application?
- Which seals and body material are compatible with the system's fluid?
- Is the application static or dynamic?
- What size coupler is required?
- What is the maximum pressure drop suitable for the application?
- Does the application require the ability to connect and disconnect under pressure?
- What is the media temperature and ambient temperature?
- What end configurations are required?
- Is an industry interchange coupler required?
- Is air inclusion and fluid loss a concern in the application?

When ordering Parker coupler bodies and nipples, please state the part number of each type of coupler body and each type of nipple desired. List coupler bodies and nipples as separate items rather than in combinations. Be sure to double check thread or hose sizes of items required.

Many of Parker's coupling products are available with unique non-standard options well suited to very specific applications. Examples of unusual end use applications might include: high temperatures (above 250°F), extremely caustic/corrosive solutions passing through the coupling, external/environmental corrosion situations, or other high wear and tear situations such as dragging the product along the ground. It is always recommended that the Quick Coupling Division be contacted with any questions concerning specific product application needs.

Typically, a prefix or suffix is added to the base part number to specify a non-standard O-ring seal, or special option such as a sleeve lock. The list at right illustrates the designations.

Please Note: Certain couplings series have additional "Special Order Information" which should be referred to in ordering those products. If applicable to the product, "Special Order Information" is found next to the Features and Specifications charts in Quick Coupling Division Catalog 3800.

Coupling Material

Coupler

- Prefix "B" for Brass - available for 3/8 & 1/2" body sizes only
- Suffix "N" for Stainless Steel springs, locking balls and brass valves. (10, 20, 30, 50, and 70 series only)

Nipple

- Prefix "B" for Brass (Standard material is stainless steel)

Seals*	Material	Suffix
Standard	Buna-N	none
Optional	Ethylene Propylene	W
Optional	Viton	Y
Optional	Neoprene	Z

Operation

- Suffix "SL" for coupler sleeve-lok (10, 20, 50, and 70 series only)
- Suffix "R" for grip-ring sleeve (10, 20, 50, and 70 series only)

*To help select proper materials, contact your Parker Quick Coupling Distributor.

Dimensions and pressures are for reference only and are subject to change.

How to Order Hydraulic Quick Couplings

When ordering Parker coupler bodies and nipples, please state the part number of each type of coupler body and each type of nipple desired. List coupler bodies and nipples as separate items rather than in combinations. Be sure to double check thread or hose sizes of items required.

Many of Parker's coupling products are available with unique non-standard options well suited to very specific applications. Examples of unusual end use applications might include: high temperatures (above 250°F), extremely caustic/corrosive solutions passing through the coupling, external/environmental corrosion situations, or other high wear and tear situations such as dragging the product along the ground. It is always recommended that the Quick Coupling Division be contacted with any questions concerning specific product application needs.

Typically, a prefix or suffix is added to the base part number to specify a non-standard O-ring seal, or special option such as a sleeve lock. The list at right illustrates the designations.

Please Note: Certain couplings series have additional "Special Order Information" which should be referred to in ordering those products. If applicable to the product, "Special Order Information" is found next to the Features and Specifications charts in Quick Coupling Division Catalog 3800.

Coupling Material

Coupler

- Prefix "B" for Brass – available for 3/8" & 1/2" body sizes only
- Suffix "N" for Stainless Steel springs, locking balls and brass valves. (10, 20, 30, 50, and 70 series only)

Nipple

- Prefix "B" for Brass (Standard material is steel)

Seals*	Material	Suffix
Standard	Buna-N	none
Optional	Ethylene Propylene	W
Optional	Viton	Y
Optional	Neoprene	Z

Operation

- Suffix "SL" for coupler sleeve-lok (10, 20, 50, and 70 series only)
- Suffix "R" for grip-ring sleeve (10 and 20 series only)

*To select proper seal materials, see Fluid Compatibility Chart in this section or contact your Parker Quick Coupling Distributor.

How to Order Brass Fittings

Brass Fittings are ordered by part number. Part numbers identify the style and size of the fitting as shown below. The first series of numbers and letters identifies the style and type fitting. The second series of numbers describes the size. Tube sizes are determined by the numbers of sixteenths of an inch in the tube OD.

Example: 269NTA-6-4

Special Prefix	Style		Type			Special Suffix	Size	Size
	Material Code (Shapes)	Category Designation	Category Designation	Category Designation	Series Code			
NI Nickel Plating TP Thread Protectors Male Threads VS Vibra-Seal W White Thread Sealant	1 Forging 2 Extrusion 3 Composite	0 Sleeve 1 Nut 63 Tube Support 7 Cross	22/42/62 26/46/66 24/44/64 42/52/62	Union Straight Female Connector Union Tee Union Elbow	45 Male Branch Tee 48/58/68 Male Connector 49/69 90° Male Elbow 50/70 Female Elbow 51/71 Male Run Tee 55/65 Union Elbow 56/76 Adapter Tee 59/79 45° Male Elbow 72 Male Branch Tee 77 Female Branch Tee		Range of sizes in sixteenths of an inch	
	Duple-Barb 20s – 30s 45° Flare (F/IF) 40s – 50s Compress/Push-In 60s – 70s (AB, CA, NTA, P, PL, PMT, PTC, VL) Pipe Adapter 200 – 2000 Side Latch/ Needle Valve 300				AB Air Brake C Compression CA Compress-Align F 45° Flare GH Garden Hose HB Hose Barb IF Inverted Flare HD Hi-Duty PTC Composite Air Brake P Pipe/Poly-Tite PLP Prestolok PMT Prestomatic w/Tube Support RB Reusable Brake Hose VL Vibra-Lok NTA Nylon Tube *Duple-Barb Numeric Only		AC Anchor Coupling B Body Only BH Bulkhead D Disconnect DE Drop-Ear Elbow GT Duple-Barb Tool HD Heavy Duty L Long Nut N Close Nipple NL Long Nipple NS Non-Swivel PB Poly-Tite Brass Sleeve PH Pin Handle PT Plastic Compression Sleeve Tube Support S Short Nut/Steel Nut SV Swivel UL Underwriter's Laboratory Listing V Viton Sleeve X Special Nut	

Dimensions and pressures are for reference only and are subject to change.

